

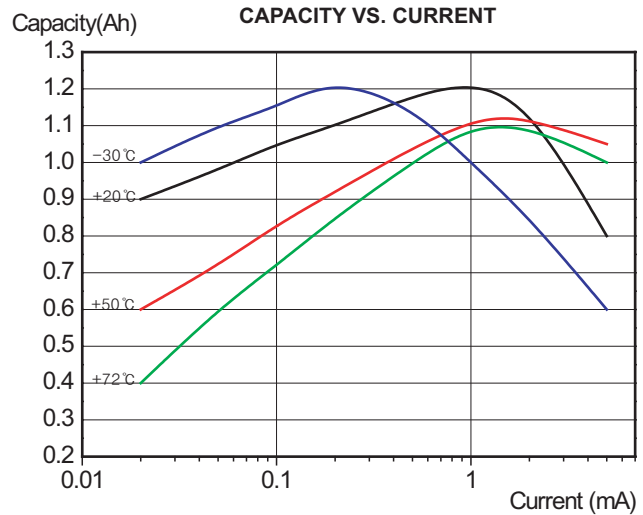


| SPECIFICATIONS | |
|--|--------------------|
| (Typical values stored at 20°C for one year) | |
| Nominal Capacity | 1.2Ah |
| (at 1mA/20°C/68°F/2.0V Cut-Off) | |
| Nominal Voltage | 3.6V |
| Maximum Continuous Current | 50mA |
| Maximum Pulse Current | 100mA |
| Operating Temperature Range | -55~85°C |
| Weight | 9g |
| Volume | 4.3cm ³ |
| UL Approval | MH28122 |

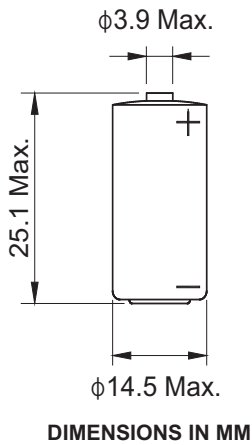

Available Terminal Type :
 STD, T1, T2, T3, T3/R,
 T3EU, T3EU/R, AX, Wire,
 Connector Type

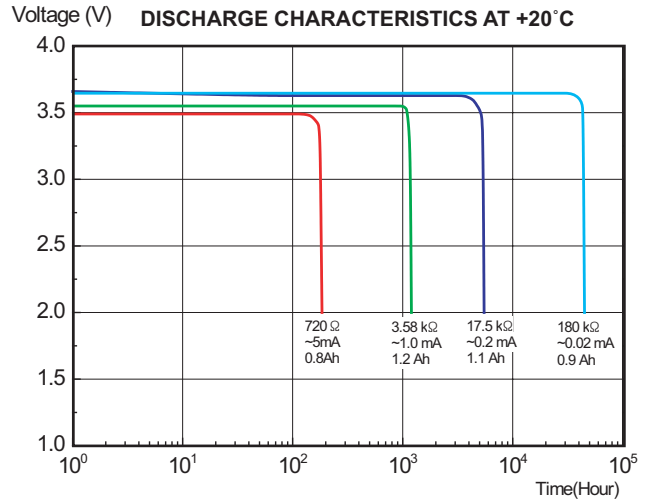