
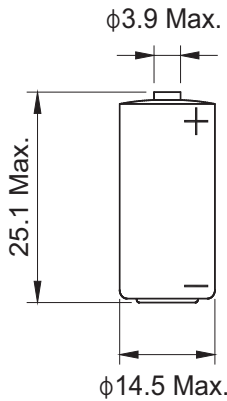



SPECIFICATIONS	
(Typical values stored at 20°C for one year)	
Nominal Capacity	0.8Ah
(at 0.6mA/85°C/185°F/2.0V Cut-Off)	
Nominal Voltage	3.6V
Maximum Continuous Current	50mA
Maximum Pulse Current	100mA
Operating Temperature Range	-55~130°C
Weight	9g
Volume	4.3cm <sup>3</sup>
UL Approval	MH28122

### DISCHARGE CHARACTERISTICS AT +85°C

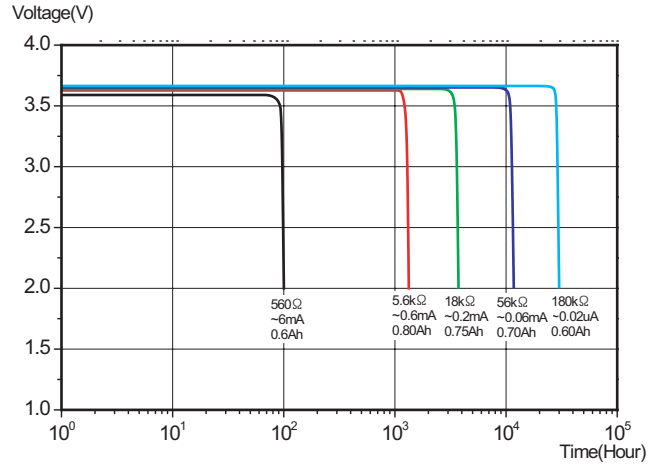

DIMENSIONS IN MM

### CAPACITY VS. CURRENT

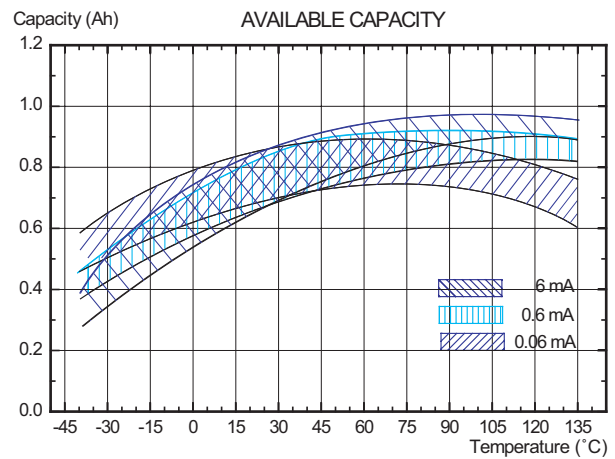

Available Terminal Type :  
 STD, T1, T2, T3, T3/R,  
 T3EU, T3EU/R, AX, Wire,  
 Connector Type

### OPERATING VOLTAGE

