




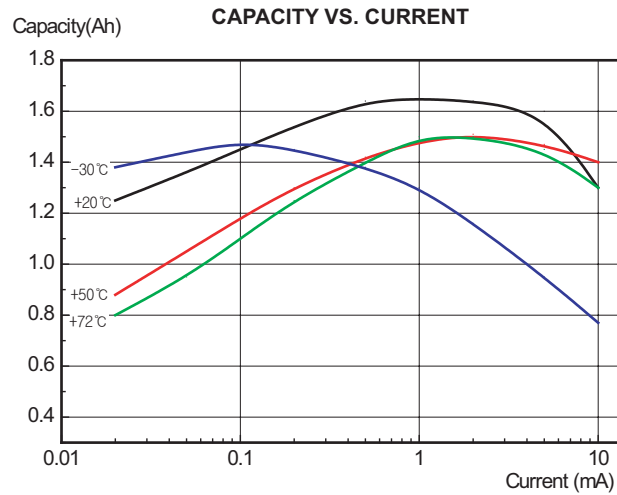

SPECIFICATIONS	
(Typical values stored at 20°C for one year)	
Nominal Capacity	1.65Ah
(at 1mA/20°C/68°F/2.0V Cut-Off)	
Nominal Voltage	3.6V
Maximum Continuous Current	60mA
Maximum Pulse Current	150mA
Operating Temperature Range	-55~85°C
Weight	11.7g
Volume	5.5cm ³
UL Approval	MH28122

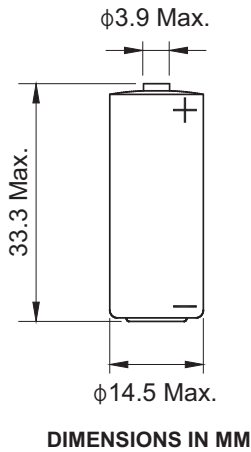

Available Terminal Type :
 STD, T1, T2, T3, T3/R,
 T3EU, T3EU/R, AX, Wire,
 Connector Type

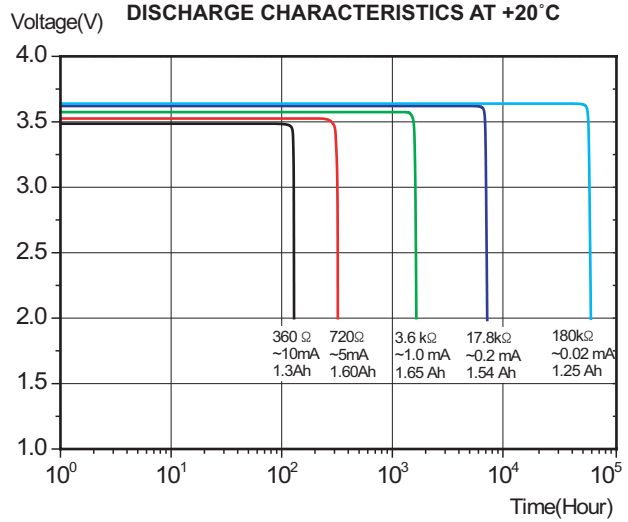