

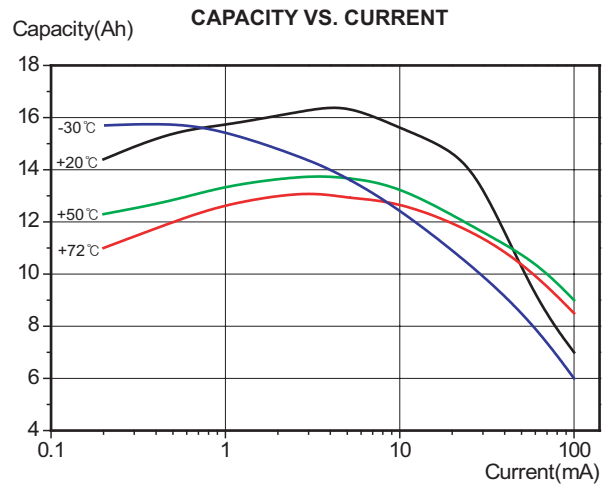


SPECIFICATIONS	
(Typical values stored at 20°C for one year)	
Nominal Capacity (at 5mA/20°C/68°F/2.0V Cut-Off)	16.5Ah
Nominal Voltage	3.6V
Maximum Continuous Current	230mA
Maximum Pulse Current	500mA
Operating Temperature Range	-55~85°C
Weight	92g
Volume	51.0cm <sup>3</sup>
UL Approval	MH28122

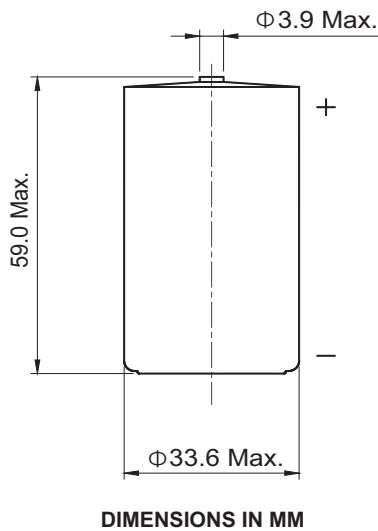

Available Terminal Type :  
STD, T1, AX, Wire,  
Connector Type

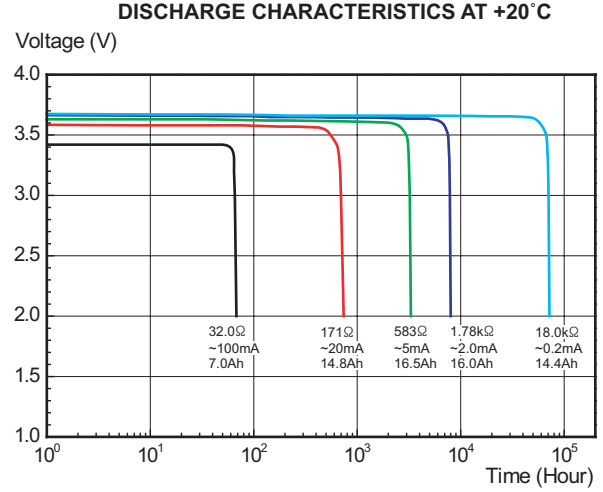