
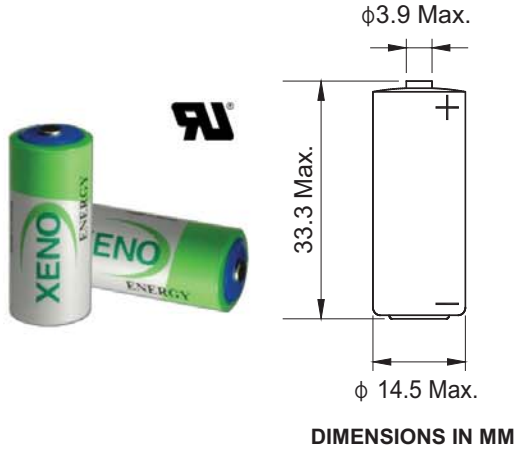


SPECIFICATIONS


(Typical values stored at 20°C for one year)

Nominal Capacity (at 1mA/20°C/68°F/2.0V Cut-Off)	1.65Ah
Nominal Voltage	3.6V
Maximum Continuous Current	60mA
Maximum Pulse Current	150mA
Rated 1sec. Pulse Current to 3V	30mA
Operating Temperature Range	-55~85°C
Weight	11.7g
Volume	5.5cm ³
UL Approval	MH28122

DISCHARGE CHARACTERISTICS AT +20°C

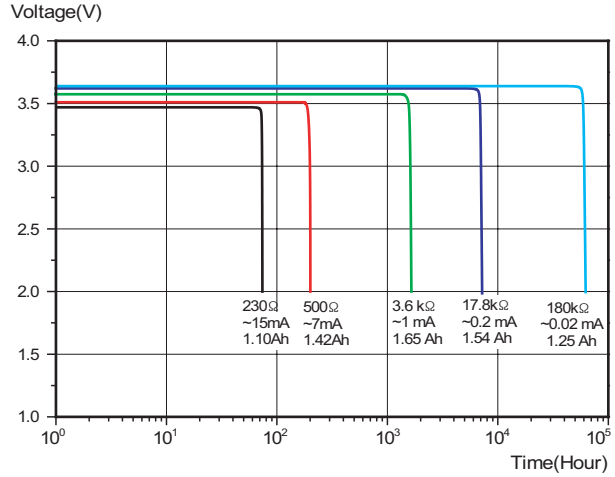

CAPACITY VS. CURRENT

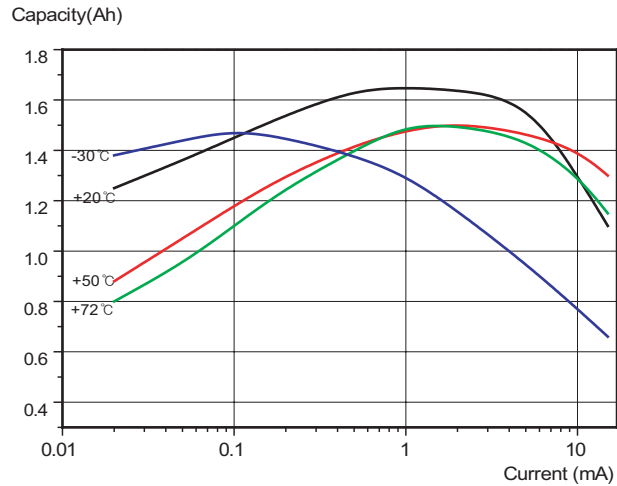

Available Terminal Type :
STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX, Wire,
Connector Type

