



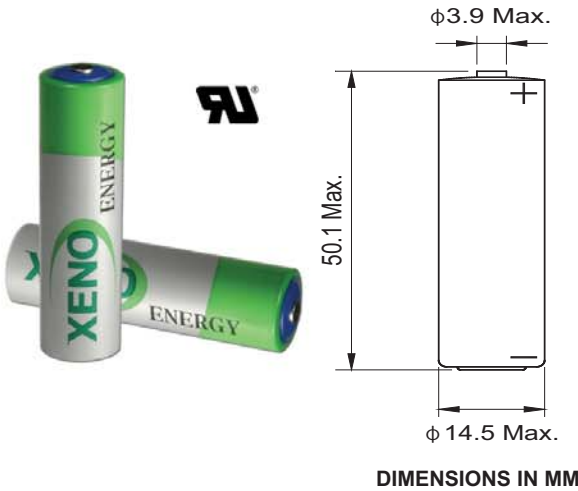


SPECIFICATIONS	
(Typical values stored at 20°C for one year)	
Nominal Capacity	2.4Ah
(at 2mA/20°C/68°F/2.0V Cut-Off)	
Nominal Voltage	3.6V
Maximum Continuous Current	100mA
Maximum Pulse Current	200mA
Rated 1sec. Pulse Current to 3V	40mA
Operating Temperature Range	-55~85°C
Weight	17.1g
Volume	8.0cm <sup>3</sup>
UL Approval	MH28122

### DISCHARGE CHARACTERISTICS AT +20°C

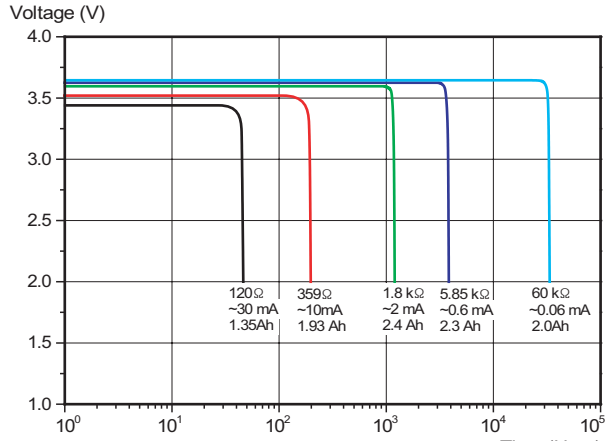

### CAPACITY VS. CURRENT

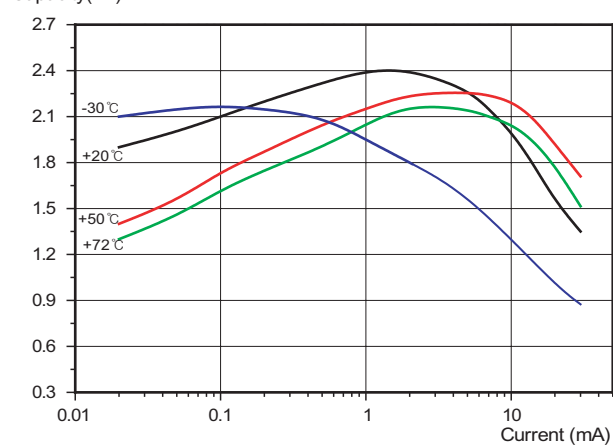


Available Terminal Type :

STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX, Wire,

Connector Type

### VOLTAGE RECOVERY AFTER LONG STORAGE

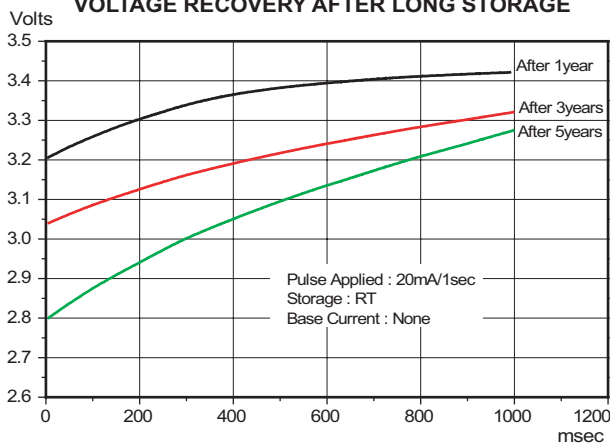

### OPERATING VOLTAGE

